


Canon



WORKGROUP SOLUTIONS

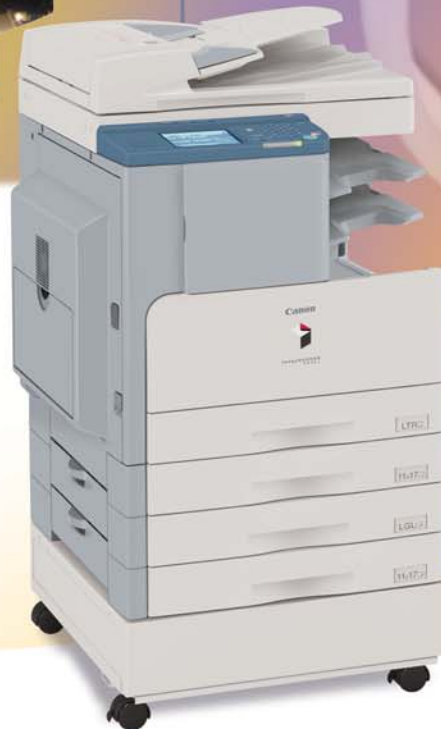

imageRUNNER®
2022i / 2018i


THE ULTIMATE IN WORKGROUP PRODUCTIVITY

The Canon imageRUNNER 2022i/2018i models deliver enhanced productivity for workgroup environments today—combining the smart multifunction capabilities that your business needs today while growing with you into the future through expandable functionality.

Producing crisp 1200 x 1200 dpi output at speeds of up to 22 and 18 pages per minute (letter), respectively, these powerful systems deliver the benefits of digital copying, network printing, color scanning, and optional fax features. Plus, intelligent technologies and communications can help you save time, space, and document production and distribution costs.

SPECIFICATIONS

Type:	Digital Multifunction Imaging System	Exposure Control:	Automatic or Manual (9 Levels)	Printer Drivers	
Imaging System:	Laser Dry Electrostatic Transfer	Document Feeding:	Standard 50 Sheets DADF	UFR II LT:	Windows 98/Me/2000/XP/ Windows Server 2003/ Windows Vista Citrix MetaFrame Macintosh OS X (OS 10.2.8 or Later)
Developing System:	Dry Single-Component Projection	Standard Paper Capacity		PCL 5e/6:	Windows 98/Me/2000/XP/ Windows Server 2003/ Windows Vista Citrix MetaFrame
Fixing System:	RAPID Fusing System	2022i:	2 x 250 + 80 Bypass (Total 580 Sheets)		
Image Server Memory (Std./Max.):	256MB/256MB RAM	2018i:	1 x 250 + 80 Bypass (Total 330 Sheets)		
First-Copy-Out Time:	6.9 Seconds from Platen Glass	Maximum Paper Capacity:	4 x 250 + 80 Bypass (Total 1,080 Sheets)		
Warm-Up Time:	One Second or Less from Sleep Mode* 26 Seconds or Less from Main Power Off*	Acceptable Paper Weight:	17 lb. to 24 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Bypass)		
Copy Speed/Print Speed		Dimensions (H x W x D)		Send Capabilities	
2022i:	Up to 22 ppm (Letter)	2022i:	29-3/4" x 24-1/2" x 26-5/8"	Sending Methods:	E-mail, I-fax, Super G3 Fax (Opt.), File Server (FTP, SMB)
2018i:	Up to 18 ppm (Letter)	2018i:	26-1/2" x 24-1/2" x 26-5/8"	Address Book:	500 Destinations
Maximum Original Size:	11" x 17"	Weight		File Formats	
Maximum Copy Size:	11" x 17"	2022i:	116 lb.	Black and White:	TIFF, PDF
Minimum Copy Size:	3-3/4" x 5/7-8"	2018i:	103 lb.	Color:	JPEG, PDF, (Compact)
Acceptable Originals:	Sheets, Books, and 3-Dimensional Items (Up to 4-3/8 lb.)	Power Requirements:	120v AC, 60 Hz, 4.6A	Sending Size:	Statement to 11" x 17"
Multiple Copies:	1 to 99	Power Consumption:	1.425 kW (MAX)	Duplexing Automatic Document Feeder	
Maximum Copy Reservation:	Five jobs	Toner Yield:	8,300 at 6% Coverage	Paper Capacity:	50 Sheets (Letter, Letter-R, Statement)
Scan Resolution:	Up to 600 x 600 dpi	Print Specifications		Acceptable Original Size:	Statement to 11" x 17"
Copy Resolution (Enhanced):	Up to 1200 x 600 dpi	CPU:	Canon Customer Processor— Shared	Acceptable Paper Weights:	10 lb. to 32 lb. Bond (One Sheet) 14 lb. to 28 lb. Bond (Multi Sheets)
Print Resolution:	Up to 1200 x 1200 dpi**	Memory:	Shared with Main Unit—256MB Std.	Document Scanning Speed:	20 Sheets/Minute (Letter, B/W)
Halftone:	256 Levels	PDL Support:	UFR II LT, PCL 5e/6 (Std.)	Dimensions (H x W x D):	4-7/8" x 22-1/4" x 19-1/4"
Automatic Trayless Duplexing:	Standard	Standard Interfaces:	10/100 Base-TX (RJ-45), Hi-Speed USB 2.0	Weight:	Approx. 16 lb.
Magnification:	20% to 200% (In 1% Increments)	Multiple Copies:	1 to 999		
Preset Reduction:	50%, 64%, 73%, 78%	Network Operating Systems:	Novell® NetWare® v. 5.1, 6, 6.5 Windows® 98/Me/2000/XP/Windows Server 2003/Windows Vista® Apple® Macintosh® OS X or Higher		
Preset Enlargement:	121%, 129%, 200%				

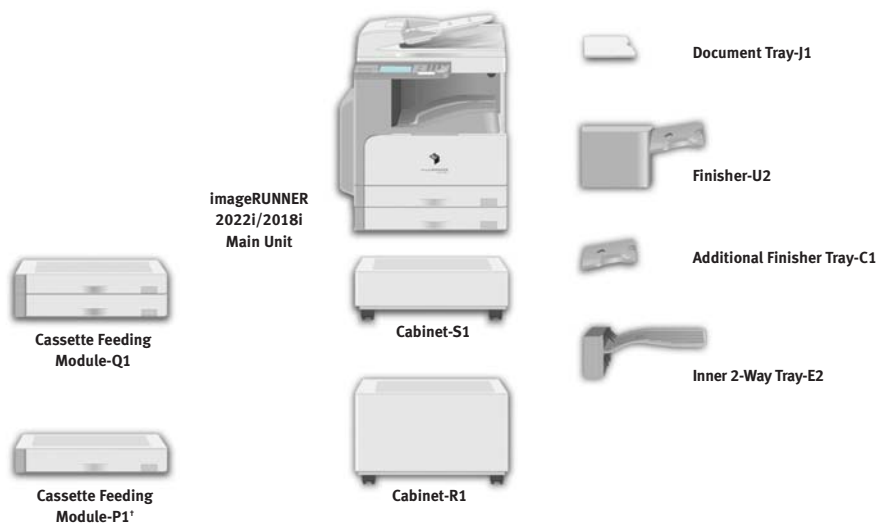

OPTIONAL ACCESSORIES

Cassette Feeding Module-Q1

Paper Capacity: 2 x 250-Sheet per Cassettes
 Acceptable Paper Size: 11 x 17", Legal, Letter, Letter-R, Statement
 Acceptable Paper Weight: 17 lb. to 24 lb. Bond
 Dimensions (H x W x D): 8" x 22-7/8" x 22-3/8"
 Weight: Approx. 26.5 lb.

Cassette Feeding Module-P1 (Optional for iR2018i only)

Paper Capacity: 1 x 250-Sheet Cassette
 Acceptable Paper Size: 11" x 17" Legal, Letter, Letter-R, Statement
 Acceptable Paper Weight: 17 lb. to 24 lb. Bond
 Dimensions (H x W x D): 4-5/8" x 22-7/8" x 22-3/8"
 Weight: Approx. 13 lb.

Inner 2-Way Tray-E2

Number of Trays: Two
 Acceptable Paper Size: Statement to 11" x 17"
 Tray Capacity
 Upper Output Tray: 100 Sheets (Letter), 50 Sheets (Other Sizes)
 Lower Output Tray: 250 Sheets (Letter), 100 Sheets (Other Sizes)
 Dimensions (H x W x D) (Inside Main Unit): 6" x 19-1/8" x 17-3/4"
 Weight: Approx. 33 lb.

Finisher-U2

Number of Trays: One (Second Tray Optional)
 Tray Capacity
 Single Tray: 770 Sheets (Letter, Statement-R), 380 Sheets (Legal, Letter-R, 11" x 17")

imageRUNNER 2022i/2018i Main Unit

With Additional Finisher Tray-C1:

200 Sheets Each Tray (Letter, Statement-R)
 150 Sheets Each Tray (Legal, Letter-R, 11" x 17")
 Staple Position/Size
 Top Left Corner: 11" x 17" (Landscape), Legal (Landscape), Letter, Letter-R
 Top Right Corner: 11" x 17" (Portrait), Legal (Portrait)
 Max. Stapling Capacity: Up to 30 Sheets (All Sizes)
 Dimensions (H x W x D) (Inside Main Unit): 11-7/8" x 18-7/8" x 20-1/2"
 Weight: Approx. 22 lb.
 Attachable Accessories: Optional Additional Finisher Tray-C1

Additional Finisher Tray-C1 (Optional for Finisher-U2)

Tray Capacity: 200 Sheets (Letter, Statement-R), 150 Sheets (Legal, Letter-R, 11" x 17")
 Dimensions (H x W x D) (Inside Main Unit): 3-2/5" x 8-1/10" x 15-3/8"
 Weight: Approx. 4 lb.

Super G3 Fax Board-AA1

Applicable Line: Public Switched Telephone Network (PSTN) Facsimile Network
 Connection Lines: One
 Address Book: 500 Destinations
 Sending Original Sizes: Statement to 11" x 17"
 Recording Printing Sizes: Statement to 11" x 17"
 Transmission Time***
 ECM-MMR: Approx. 3.2 Seconds/Page (33.6 Kbps)

Document Tray-J1

Finisher-U2

Additional Finisher Tray-C1

Inner 2-Way Tray-E2

GRMR Method: Approx. 13 Seconds/Page (33.6 Kbps)
 GRMH Method: Approx. 13 Seconds/Page (33.6 Kbps)
 JBIG: Approx. 2.6 Seconds/Page (33.6 Kbps)
 Scan Line Density
 Standard: 8 Pels/mm x 3.85 Lines/mm
 Fine: 8 Pels/mm x 7.7 Lines/mm
 Super Fine: 8 Pels/mm x 15.4 Lines/mm
 Ultra Fine: 16 Pels/mm x 15.4 Lines/mm
 Image Memory: Approx. 1,000 Pages

Additional Supplies and Accessories

- Basic Card Set
- Braille Label Lit-A1
- Cabinet-R1 (Large)
- Cabinet-S1 (Small)
- Card Reader Attachment-D1
- Card Reader-E1
- Copy Card Sets
- Document Tray-J1
- Power Supply Kit-Q1
- Barcode Printing Kit-B1
- FL Cassette-AF1
- Stamp Ink Cartridge-C1
- Staple Cartridge-J1
- GPR-18 Black Toner

* At room temperature of 20°C/68°F
 ** UFR II LT only.
 *** Approximately 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (JBIG, Standard Mode) at 33.6 Kbps modem speed when transmitting to another v. 34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.
 † Option for imageRUNNER 2018i only
 †† Standard configuration of imageRUNNER 2022i device shown; the imageRUNNER 2018i device ships standard with one paper cassette.

Canon
*image*ANYWARE

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and ENERGY STAR mark are registered U.S. marks. Novell and NetWare are registered trademarks of Novell Inc. in the United States and other countries. Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries. Macintosh is a trademark of Apple Computer, Inc. CANON, IMAGERUNNER, and the Super G3 and Genuine logos are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners.

Specifications and availability subject to change without notice.
©2007 Canon U.S.A., Inc. All rights reserved.

1-800-OK-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

